




For decorating complex parts with few channels

- Cycle time can be reduced by 30% compared to a standard CKO machine.
- For tighter tolerances on residual sand rate.
- The Siif system (patented) allows turn over of the castings (0 to 350°) during vibration phase.

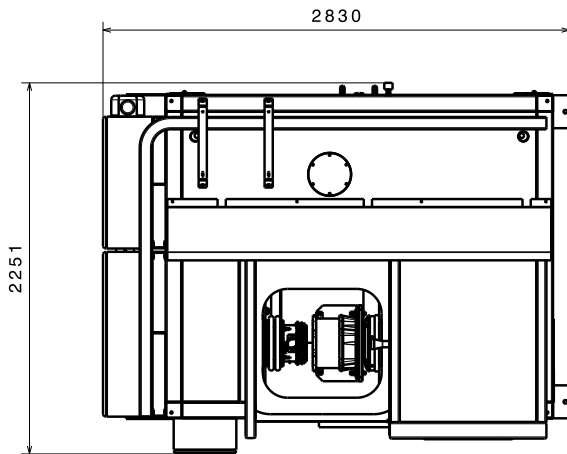

Number of casts to be processed	Castings weight	Rotation 0 to 350°	Castings size	Machine dimension L x l x H
1	< 80 kg	yes	300 x 750 x 750 mm	2.8 x 2.2 x 1.8 m

DSA C

DSA B

DSA R

DSA D

DSA DR

Hammering station

Innovations and specificities