





DSA R



FOR COMPLEX CASTINGS WITH REDUCED CORE

- Cycle time can be reduced by 30% compared to a standard CKO machine.
- For tighter tolerances on residual sand rate.
- The SiiF system (patented) allows turn over of the castings (0 to 350°) during vibration phase.

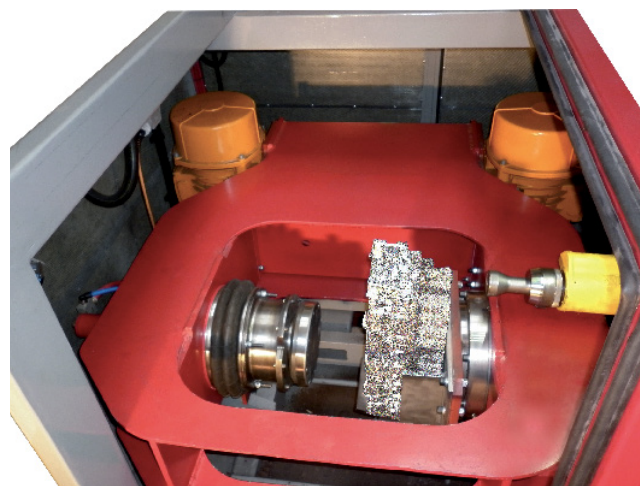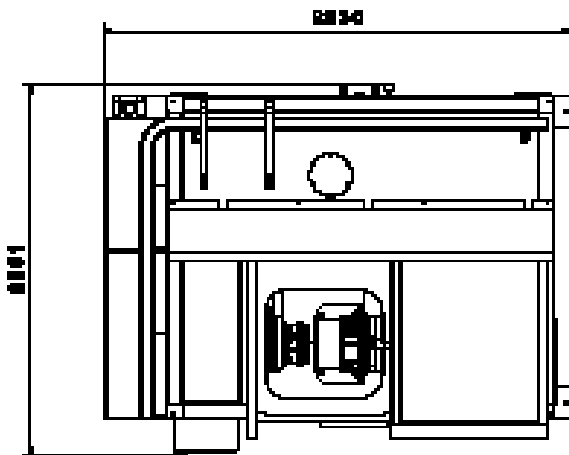

Number of casts to be processed	Castings weight	Rotation 0 to 360°	Castings size	Machine dimension L x l x H
1	< 80 kg	yes	300 x 750 x 750 mm	2.8 x 2.2 x 1.8 m